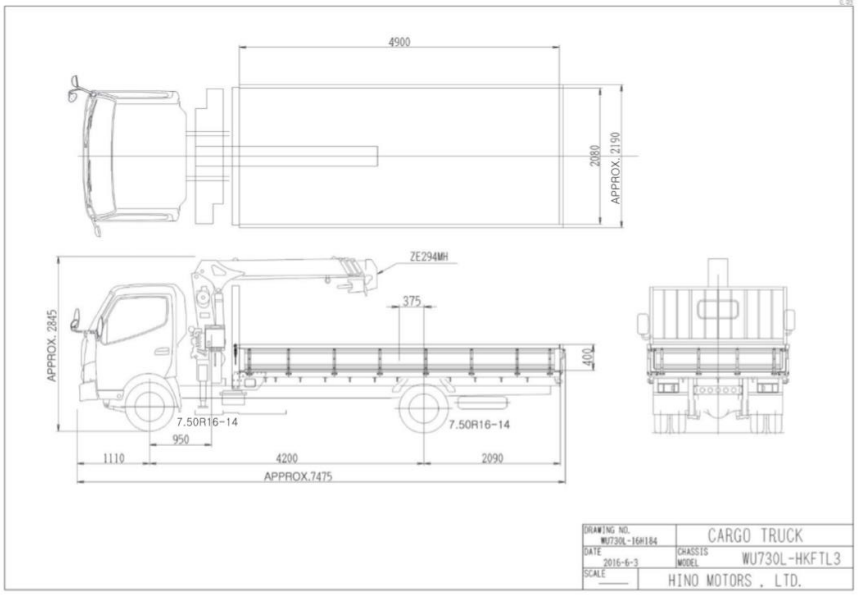

Specifications

COMPLETE BUILT-UP VEHICLE

MODEL	HINO WU730L-HKFTL3 4,100kg Cargo Truck (Wooden type) w/3,030kg Crane (TADANO TM-ZE294MH)
SPEC. NO.	CC-WU020A
BODY SPEC. NO.	T-16H184
CRANE SPEC. NO.	TM-29Z-5-03064/EX-02

DIMENSIONS

Overall length (mm)	APPROX.	7,475
Overall width (mm)	APPROX.	2,190
Overall height (mm)	APPROX.	2,845
Wheelbase (mm)		4,200

MASS

Vehicle mass, total (kg)	APPROX.	4,170 *
Gross vehicle mass (kg)	APPROX.	8,465 *
At Max. payload (kg)		4,100

*: Including spare tire

PERFORMANCE (at G. V. M. Rating)

At G.V.M. Rating (kg)	8,500
Max. speed (km/h)	108
Gradeability tan θ (%)	36.9

WORKING RANGE

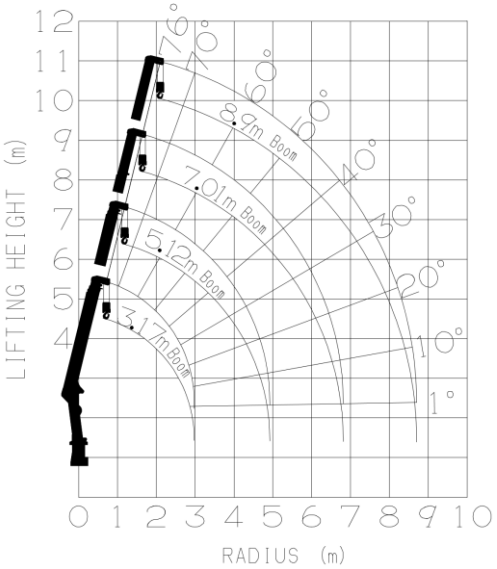

RATED LIFTING CAPACITIES IN KILOGRAMS

Crane Strength Rated Capacities

Load Radius	3.17 m / 5.12 m Boom Extension width of outriggers Full	3.17 m / 5.12 m Boom Extension width of outriggers Minimum	Load Radius	7.01 m Boom Extension width of outriggers Full	Load Radius	8.9 m Boom Extension width of outriggers Full
1.5 m and below	3,030	1,580	2.2 m and below	1,880	3.0 m and below	1,030
2.0 m	2,330	980	2.5 m	1,680	3.5 m	930
2.5 m	1,880	680	3.0 m	1,430	4.0 m	830
3.0 m	1,500	480	3.5 m	1,230	5.0 m	680
3.5 m	1,250	380	4.0 m	1,080	6.0 m	580
4.0 m	1,080	280	4.5 m	930	7.0 m	480
4.5 m	930	250	5.0 m	830	8.0 m	400
4.92m	850	230	5.5 m	730	8.7 m	350
			6.0 m	650		
			6.81m	580		

NOTES : 1. The mass of hook block (30kg), slings and all similarly used load handling devices must be added to the mass of the load.
2. The above numerical values of total rated loads are based on crane strength only. The total rated loads based on stability may lower than those in the above table depending on the loading conditions and the types of the chassis.

4t truck with 3t crane（3boom）

KINAN MYANMAR KINAN CO.,LTD