




## Specifications

Light Tower		Unit	
Frequency (Hz)	50	Maximum height (mm)	4075~2155
Lamp	Type x number of lights	Minimum dimensions (mm)	1423(L) x 1070(W) x 1655(H)
	Total luminous flux	Total weight (kg)	337

Mast	Number of row	3
	Material	Hard aluminum
	Elevator	Hand winch
	Fall preventive device	Stopper pin
Wagon	Wheel	φ300mm Pneumatic tire
	Break	Foot break
	Outtrigger	Lift type x 2
Dry Weight (kg)	169	

Equipped Generator	
Model	IDG3100M
Output (kVA)	3.1
Starting method	Electric start
Fuel (Tank Capacity)	Diesel (15.5L)
Continuous operation (H)	16
Noise level (dB(A))	60
Oil caution device	Equipped
Dry weight (kg)	168

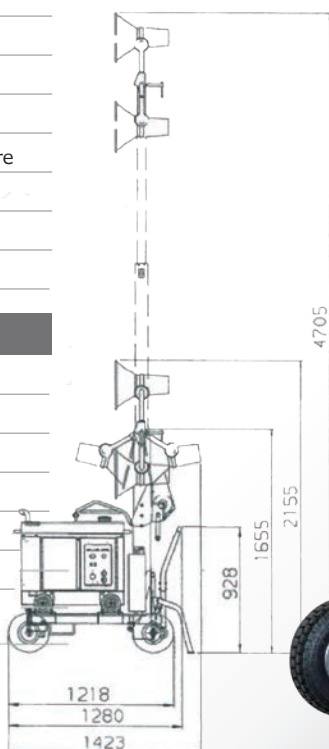

Shindaiwa brand light tower is dedicated for construction site with stable bright lighting, low noise, and low fuel consumption.

