




→ NUL09-7

Crawler type
Articulated boom lift

FEATURES

- ✓ Low emission
- ✓ Allowable tilt 5°
- ✓ Operation restriction (slope)

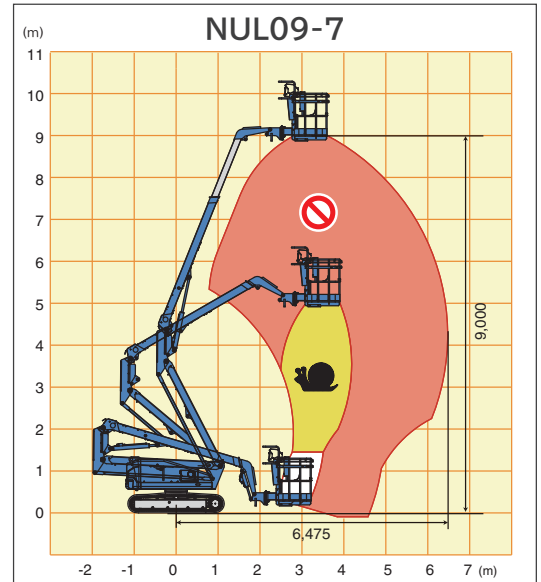

TYPE	NUL09-7
Platform capacity	200 kg
Allowable tilt	5°
Platform dimensions (W x L x H)	1,130 x 730 x 1,000 mm
Platform height (max)	9,000 mm
Horizontal reach	6,475 mm
Machine weight (w/pad)	4,750 (4,750) kg
Overall length	5,250 mm
Overall width	1,980 mm
Overall height	2,250 mm
Engine model	KUBOTA D1305
Travel speeds	0.7/1.3 km/h

Lifting the machine

- ⚠ Use only qualified rigging to hoist the machine.
- ⚠ Be sure that lifting devices and crane are sufficient to withstand the machine weight.
- Ensure the boom is in stowed position before lifting.
- Determine the center of gravity of the machine as shown below.
- Attach the rigging to designated lifting rings on the machine.
- Insert protective materials where rigging may interfere with the machine.

