

shindaiwa®

DG1000MI

Tough, clean engine, quiet genset.



Powered by
ISUZU

Generating

80/100kVA

**200/220V
3-phase**

**400/440V
3-phase**

Sound Level (no load@7m)

61 dB(A)

Dimension

(L)2,750(W)1,000(H)1,400(mm)

Weight (kg)

1800

Engine (Diesel)

Isuzu 6BG1

JPN T2

Features

Engine safety device

Large maintenance doors

Alternator

Rated Output	80/100kVA 64/ 80kW
Voltage-Three phase	200/220,400/440 V
Rated speed	1500/1800 rpm
Winding	Star with Neutral
Insulation class	H

Engine

Type	Vertical Water-cooled 4-cycle Diesel
Model (Manufacturer)	DD-6BG1T(ISUZU)
Engine Emission	Japanese Tier2
Continuous rated output	73.1kW(99.4PS)/1500min ⁻¹
Rated speed,50/60Hz	1500/1800 rpm
Displacement	6.494L
Combustion system	Direct Injection, Turbo charger
Cooling method	Radiator, Water
Fuel tank capacity	219 L

Features

Shutdowns	Lamp indication with shutdown
Warning	Lamp indication
Dimensions	2750*1000*1400mm, 1800kg
Sound Level (No Load)	61dB(A) @ 7m


shindaiwa[®]

DG1000MI-400 Latest clean engine,
quietest genset.

Large maintenance side doors

Easy access to radiator & muffler

Removable side doors

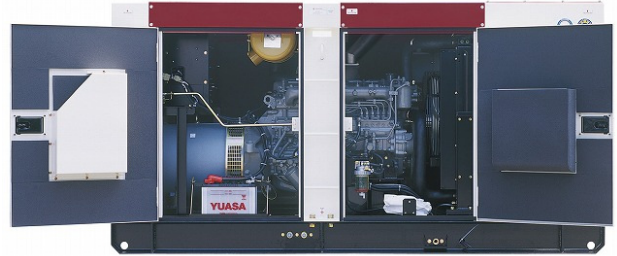

Frequency Adjusting Screw

Emergency Stop Button

Indication lamp

Fuel Drain Plug

Coolant Drain Plug

External Fuel Intake

External Fuel Return



All doors are lockable

Fuel strainer

YAMABIKO

Industrial Machinery Div.

35 SHIN-UJIGAMI KITA-HIROSHIMA-CHO

YAMAGATA-GUN HIROSHIMA 731-1597

JAPAN

Distributed by: